



# Ezyflow™

## Water Sampling Pump

Easy Load Pump Head  
Quick Connect Carrier



## Ezyflow™ EZ-65-000 Designed For Higer Flow

### Ezyflow™ Water Sampling Pump Includes

Ezyflow™ easy load pump head and AC adapter

#### Key Features

- Small compact design
- Robust and easy to carry case
- Illuminated "ON/OFF" indicator
- Speed control from low to high speeds
- Reversible flow and prime/purge function
- Includes Ezyflow® easy load pump head
- Easy top plate charging station
- IP54-rated control panel protects against inclement weather and splashing water
- Rechargeable battery — ideal for field applications
- Suitable for various liquids
- Supporting various tube material for transferring different liquids
- Samples from depths of up to 7.9 meters (26 feet)

#### Specifications & Description

- Pump: peristaltic type with easy load system
- Weather Proof: IP54
- Variable Speed: manual control knob
- Max Speed: 600 RPM
- Max Flow Rate: 1740 ml/min
- Pump Head: quick connect Ezyflow™
- Tubing Sizes: 15, 24
- Drive IP rating: IP54
- Power (VAC): 90 to 115/230
- Power (VDC): 12
- Dimensions: 8" width x 17.5" length x 8 1/2" high
- Weight: 21 lbs


#### Technical Parameters

Model	Pump Head	Motor	Tube	Flow Range (ml/min)	Max Speed (rpm)
EZ-65-000	Ezyflow™	DC12V	15 or 24	0-1740	600


Tube	ID in/mm	OD in/mm	Max Speed (rpm)	Max Flow Range (ml/min)	Hose Material
EZ-15	0.18 in /4.6 mm	0.38 in /9.7 mm	600	0-6000	Silicone tube
EZ-24	0.25 in /6.4 mm	0.44 in /11.2 mm	600	0-6000	



#### Pump Head Assembly

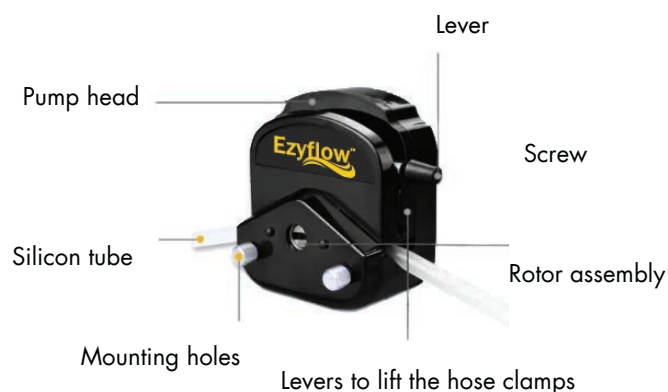

#### Ezyflow™ Pump

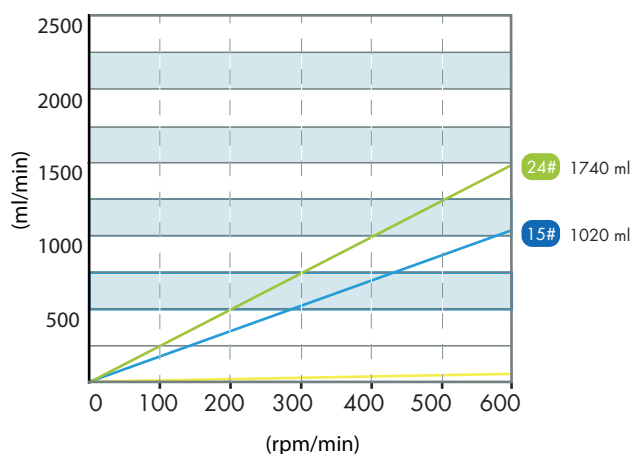

**1-877-663-9660**  
**www.terraquip.ca**